


Specifications

MODELS		SLC™-18	
MEASUREMENTS		US	Metric
Working height:			
standard forks - forks down		16 ft 9 in	5.10 m
standard forks - forks up		18 ft 6 in	5.64 m
adjustable forks - forks down		16 ft 9 in	5.10 m
adjustable forks - forks up		18 ft 6 in	5.64 m
boom**		17 ft 9 in	5.41 m
A	Height - stowed	7 ft 2 in	2.18 m
B	Length - stowed	2 ft 10 in	.86 m
C	- operating	6 ft 1 in	1.85 m
D	Width - stowed*	2 ft 7.5 in	.80 m
	- with stabilizers lowered	5 ft 6 in	1.68 m

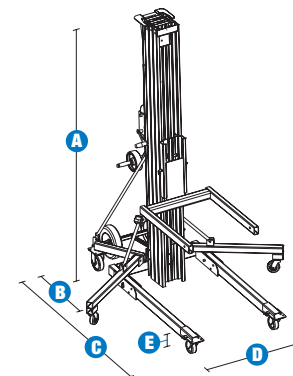

PRODUCTIVITY			
Load capacity:			
14 in (36 cm) load center		650 lbs	295 kg
24 in (61 cm) load center		425 lbs	193 kg
42 in (107 cm) load center		160 lbs	73 kg
E	Ground clearance	2 in	.05 m
Load height minimum		6 in	.15 m

POWER			
Average cranks:			
standard winch		8.5 cranks/ft	27.8 cranks/m
two speed winch, high		4 cranks/ft	13.1 cranks/m
two speed winch, low		15 cranks/ft	49.2 cranks/m

WEIGHT			
		307 lbs	139 kg

LOAD HANDLING ATTACHMENTS				
MEASUREMENTS	US	Metric	Weight - US	Weight - Metric
Standard forks (l/w/d)***	28/23/2.5 in	71/58/6 cm	26.5 lbs.	12 kg
Adjustable forks (l/w/d)***	27.5/12-30/2.5 in	70/30-76/6 cm	52.5 lbs.	24 kg
Fork extensions detached (each) (l/w/d)***	30/2/3 in	76/5/8 cm	4.5 lbs	2 kg
Fork extensions attached (each) (l/w/d)***	25/2/3 in	64/5/8 cm	4.5 lbs	2 kg
Boom (l/w/d)***	18-42/1.5/6 in	46-107/4/15 cm	39.9 lbs	18 kg
Pipe cradle (l/w/d)*** /****	27/24/6 in	69/61/15.2 cm	10 lbs	4.5 kg
Load platform (l/w/d)***	26.3/23/2.5 in	67/58/6 cm	31.5 lbs	14 kg