


GS™-2632


 Toll Free - 1800 MASSIVE

Specifications

MODELS		GS™-2632
MEASUREMENTS		Metric
Working height maximum*		9.92 m
A Platform height maximum		7.92 m
B Platform height stowed		1.16 m
C Platform length - outside		2.26 m
extended		3.18 m
Slide-out platform extension deck		0.91 m
D Platform width - outside		0.81 m
Guardrail height: fixed rails		_____
fold down rails		1.10 m
Toeboard height		0.15 m
E Height - stowed		_____
fixed rails		_____
folding guardrails		2.26 m
rails folded		1.91 m
F Length - stowed		2.44 m
Length - extended		3.33 m
G Width		0.81 m
H Wheelbase		1.85 m
I Ground clearance - centre		0.09 m
J - with pothole guards deployed		0.02 m

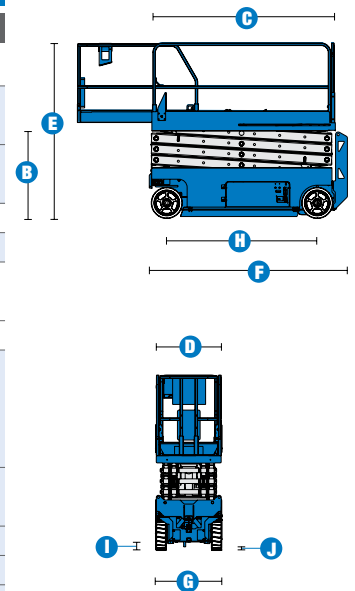

PRODUCTIVITY	
Maximum platform occupancy**	
- indoor	2
- outdoor	_____
Lift capacity	227 kg
Extension deck capacity	113 kg
Drive height	full height
Drive speed - stowed	3.5 km/h
Drive speed - raised	0.8 km/h
Gradeability - stowed***	25%
Maximum outrigger leveling: front to back	_____
side to side	_____
Turning radius - inside	zero
Turning radius - outside	2.13 m
Raise / lower speed	30 / 40 sec
Controls	proportional
Drive	dual front wheel
Multiple disc brakes	dual rear wheel
Tyres - solid non-marking	38 x 13 x 28 cm

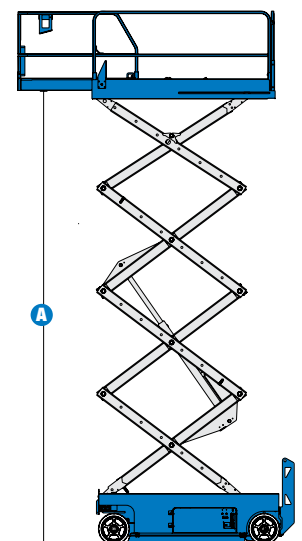

POWER	
Power source	24V DC (four 6V 225 Ah batteries)
Hydraulic system capacity	14.2 L
WEIGHT****	
	1,956 kg

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height.

** CE/AUS markets: GS-2632 and GS-3232 indoor use only.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.



GS™ -2632

 Toll Free - 1800 MASSIVE

Features

STANDARD FEATURES

MEASUREMENTS

GS™ -2632

- 9.92 m working height
- Up to 227 kg lift capacity

PRODUCTIVITY

- 2.26 m x 0.81 m steel platform
- 0.91 m extension deck
- Folding rails with half-height swing gate
- Dual front wheel drive
- Proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- Onboard diagnostic system
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Multiple disc brakes
- Brake release
- Solid non-marking tyres
- Pothole guards
- Tilt alarm
- Descent alarm
- Electronic horn
- Hour meter
- Dual flashing beacons
- Motion alarm

POWER

- 24 V DC (four 6 V 225 Ah batteries)
- Universal 20 amp smart charger



Distributed by:

 **QUICK ACCESS**

VICTORIA - 10-12 Industry Park Dr Brooklyn VIC 3012

NSW - 3/192 Wisemans Ferry Road Somersby NSW 2250

www.quickaccess.com.au

Effective Date: April 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operators' Manual for instructions on the proper use of this equipment. Failure to follow the Operators Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation, Terex South Dakota, Inc., and/or their subsidiaries in the USA and other countries. All rights reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. in the USA and many other countries. ©2009 Terex Corporation.