


GS™ -2646



Specifications

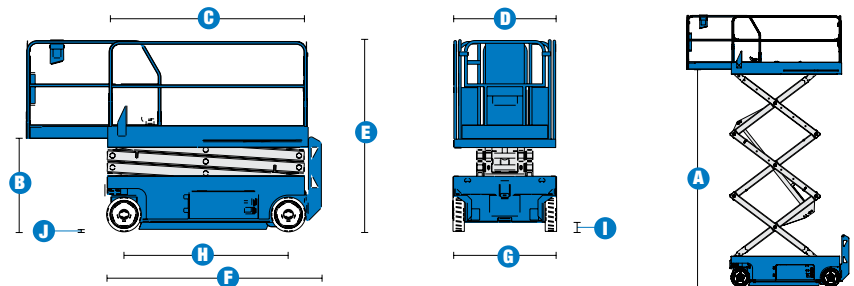

MODELS		GS™-2646	
MEASUREMENTS		Metric	
Working height maximum*		9.92 m	
A Platform height maximum		7.92 m	
B Platform height stowed		1.16 m	
C Platform length - outside		2.26 m	
extended		3.18 m	
Slide-out platform extension deck		0.91 m	
D Platform width - outside		1.15 m	
Guardrail height		1.09 m	
Toeboard height		0.15 m	
E Height - stowed: folding guardrails		2.26 m	
rails folded		1.68 m	
F Length - stowed		2.41 m	
extended		3.31 m	
G Width		1.17 m	
H Wheelbase		1.85 m	
I Ground clearance - centre		0.10 m	
J - with pothole guards deployed		0.02 m	
PRODUCTIVITY			
Maximum platform occupancy** - indoor		2	
- outdoor		2	
Lift capacity		454 kg	
Lift capacity - extension deck		113 kg	
Drive speed - stowed		3.5 km/h	
Drive speed - raised		0.8 km/h	
Gradeability - stowed***		30%	
Turning radius - inside		zero	
Turning radius - outside		2.29 m	
Raise / lower speed		30 / 38 sec	
Controls		proportional	
Drive		dual front wheel	
Multiple disc brakes		dual rear wheel	
Tyres - solid non-marking		38 x 13 x 28 cm	
POWER			
Power source		24V DC (four 6V 225 Ah batteries)	
Hydraulic system capacity		14.2 L	
WEIGHT****			
		1,974 kg	
STANDARDS COMPLIANCE		ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10	

* The metric equivalent of working height adds 2 m to platform height.

** CE/AUS markets: Two person maximum occupancy on all models. GS-3246 outdoor maximum occupancy is one person.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

GS™ -2646

 Toll Free - 1800 MASSIVE

Features

STANDARD FEATURES

MEASUREMENTS

- **GS™ -2646**
- 9.92 m working height
- Up to 454 kg lift capacity

PRODUCTIVITY

- 2.26 m x 1.15 m steel platform
- 0.91 m extension deck
- Folding rails with full height swing gate
- Dual front wheel drive
- Proportional lift and drive
- Platform control with battery charge indicator and diagnostic display
- Onboard diagnostic system
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Brake release
- Drive speed interlock
- Swing-out component tray
- Solid non-marking tyres
- Pothole guards
- Tilt alarm
- Descent alarm
- Electronic horn
- Hour meter
- Dual flashing beacons
- Motion alarm



POWER

- 24 V DC (four 6 V 225 Ah batteries)
- Universal 20 amp smart charger

Distributed by:

 **QUICK ACCESS**

VICTORIA - 10-12 Industry Park Dr Brooklyn VIC 3012

NSW - 3/192 Wisemans Ferry Road Somersby NSW 2250

www.quickaccess.com.au