



Specifications

Models	GS-4069 RT
Measurements	Metric
Working height maximum*	14.12 m
A Platform height maximum	12.12 m
Drive height	12.12 m
B Platform height - stowed	1.65 m
C Platform length - outside	2.79 m
extended	4.32 m
Slide-out platform extension deck	1.52 m
D Platform width - outside	1.60 m
Toeboard height	0.15 m
E Height - stowed**	2.74 m
rails lowered	2.08 m
F Length - stowed	3.76 m
platform extended	4.81 m
with outriggers	3.76 m
G Width	1.75 m
H Wheelbase	2.29 m
I Ground clearance - center	0.24 m



Productivity

Maximum platform occupancy***	3
Lift capacity	363 kg
Extension deck capacity	136 kg
Drive speed - stowed	5.6 km/h
Drive speed - raised	0.5 km/h
Gradeability - stowed****	30%
Maximum outrigger leveling:	
front/back uphill	5.3° / 4.2°
side to side	11.7°
Turning radius - inside	2.11 m
Turning radius - outside	4.6 m
Raise/lower speed	69/46 sec
Controls	proportional
Drive	four wheel
Tyres - rough terrain	30x66 cm

Power


Power source	Kubota D-1105 Diesel 24.8 hp
Fuel tank capacity	37.9 L
Hydraulic system capacity	68.1 L

Weight*****

5,078 kg

Standards Compliance

ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

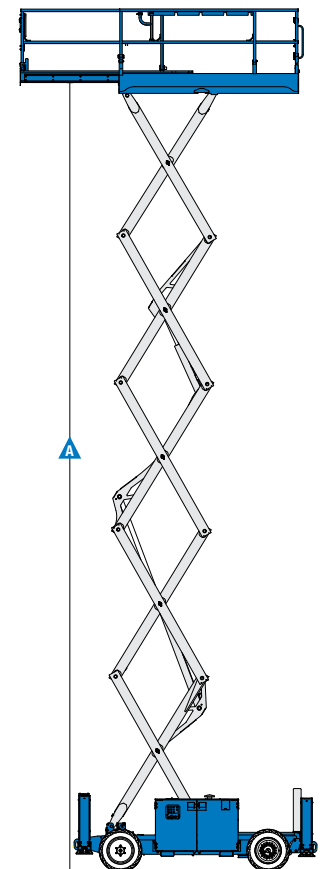

* The metric equivalent of working height adds 2 m to platform height. U.S. Adds 6 ft to platform height.
 *** CE/AUS markets: GS™-3369 and GS™-4069 are limited to 2 person platform occupancy when used outdoors.
 **** Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.
 ***** Weight varies depending on options and country standards.



Features

Standard Features

Measurements

- **GS-4069 RT**
- 14.12 m (45 ft 9 in) working height
- Up to 363 kg (800 lbs) lift capacity

Options & Accessories

Productivity

Power Options

- 240 Volt power to platform

Productivity

- 2.79 x 1.6 m (110 x 63 in) steel frame platform with replaceable aluminum deck
- 1.52 m (5 ft) extension deck
- Automatic leveling hydraulic outriggers
- Folding guardrails
- Proportional lift and drive
- Full height swing gate
- 4WD
- Front oscillating axle
- Positive traction control
- Four-wheel braking
- Swing-out engine tray
- Non-marking foam-filled rough terrain tyres (eco fill)
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Dual flashing beacons
- Platform overload system
- Motion alarm
- Hydraulic oil cooler

Power

- Kubota Diesel 18.5 kW (24.8 hp)



Distributed by:



VICTORIA - 10-12 Industry Park Dr Brooklyn VIC 3012

NSW - 3/192 Wisemans Ferry Road Somersby NSW 2250

www.quickaccess.com.au

Toll Free - 1800 MASSIVE