Self-Propelled Scissor Lifts
GS-5390RT

Genie
A TEREX BRAND

Specifications

Models	GS-5390 RT
Measurements	**Metric**
Working height maximum*	18.15 m
A Platform height maximum	16.15 m
B Platform height - stowed	2.02 m
C Platform length:	3.98 m
D outside, extended	6.57 m
E Slide-out platform extension deck - front	1.52 m
F Slide-out platform extension deck - rear	1.22 m
G Platform width - outside	1.83 m
H Height: stowed	3.15 m
stowed - rails lowered	2.47 m
I Length - stowed:	4.88 m
Length - extended	6.57 m
J Width	2.34 m
K Wheelbase	2.84 m
L Ground clearance - center	0.36 m



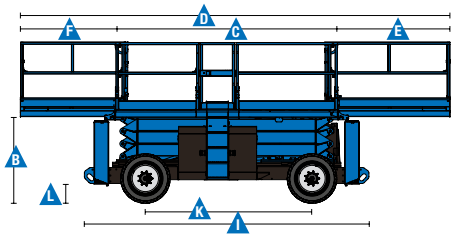

Productivity

Maximum platform occupancy	4
Lift capacity	680 kg
Lift capacity - extension deck	227 kg
Drive height	9.14 m
Drive speed - stowed	6.4 km/h
Drive speed - raised	1.1 km/h
Gradeability - stowed**	40%
Maximum outrigger leveling: front to back	7°
side to side	12°
Turning radius - inside	2.16 m
Turning radius - outside	5.33 m
Controls	proportional
Drive	four wheel
Raise / lower speed	55 / 49 sec
Tires - foam-filled rough terrain	30 x 84 cm

Power

Power source	Deutz D2011L03i 3 cylinder diesel 48 hp (35.8 kW)
Auxiliary power unit	12 V DC
Fuel tank capacity	113.6 L
Hydraulic system capacity	113.6 L

Weight***

Weight	7,776 kg

Standards Compliance

AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
*** Weight will vary depending on options and/or country standards.

QUICK ACCESS
www.quickaccess.com.au

Self-Propelled Scissor Lifts
GS-5390RT

Genie
A TEREX BRAND

Features

Standard Features

Measurements

- **GS-5390**
- 18.15 m (59 ft) working height
- Up to 680 kg (1,500 lbs) lift capacity

Productivity

- 3.98 x 1.83 m (156.5 x 72 in) steel frame platform
- Dual slide-out platform extension deck package 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- Replaceable aluminum diamond plate deck
- Proportional lift and drive
- Onboard diagnostic system
- Two self-closing gates
- 4WD
- Automatic leveling hydraulic outriggers
- Oscillating axle
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled non-marking rough terrain tires (eco fill)
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Dual flashing beacons
- Motion alarm

Power

- 48 hp (35.8 kW) Deutz D2011L03i diesel

Options & Accessories

Productivity Options

- Air line to platform
- Biodegradable hydraulic oil

Power Options

- 7 kVA hydraulic generator (240V/50 Hz)
- 240V power to platform

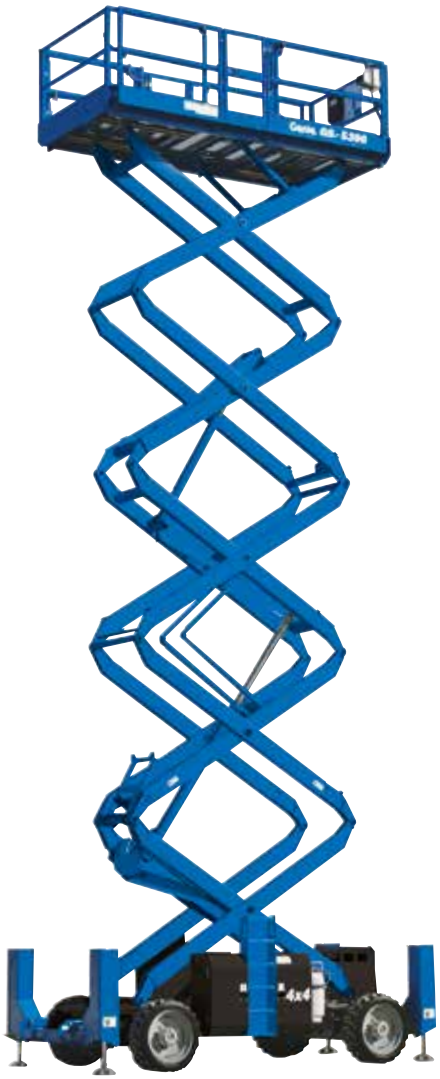

Distributed by:

QUICK ACCESS
VICTORIA - 10-12 Industry Park Dr Brooklyn VIC 3012
NSW - 3/192 Wisemans Ferry Road Somersby NSW 2250
www.quickaccess.com.au
Toll Free - 1800 MASSIVE

Effective Date: April, 2015. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. © 2016 Terex Corporation.