

Performance

Platform Height	20.32 m
Working Height	22.32 m
Horizontal Outreach	17.30 m
Swing	360 Degrees Continuous
Platform Capacity	230 kg
Platform Size	0.91 x 2.44 m
Platform Rotator	180 Degrees Hydraulic
Jib Length	1.83 m
Jib Range of Articulation	130 Degrees (+70, -60)
Weight*	12,900 kg
Drive Speed	6.8 km/h
Gradeability	45%
Turning Radius	
Outside	2.89 m
Inside	1.40 m

Standard Specifications

Power Source

Diesel Engine	
Deutz D2011L04	36.5 kW
Fuel Tank Capacity	151 L

Hydraulic Reservoir

• Hydraulic Reservoir	98.4 L
• Auxiliary Power	12V-DC

Tyres

• Standard	Foam-Filled
------------	-------------

Standard Features

- 4 Wheel Hydrostatic Drive, 4 Wheel Steer
- 180 Degree Hydraulic Platform Rotator
- Platform Console Machine Status Light Panel*
- AC Generator including AC Outlets to Platform
- 4 Degree Tilt Alarm/Indicator Light
- Swing Out Engine Tray
- 12V-DC Auxiliary Power
- Hourmeter
- Proportional Controls
- Control ADE® System
- Lifting/Tie Down Lugs
- Horn
- Oscillating Axle
- Operator Tool Tray
- Inward Self-Closing Swing Gate
- Flashing Amber Beacon
- Motion Alarm
- Glow Plugs (Diesel Engines)
- Cylinder Bellows


660SJ TELESCOPIC BOOM LIFT



660SJ TELESCOPIC BOOM LIFT

Dimensions

All dimensions are approximate.

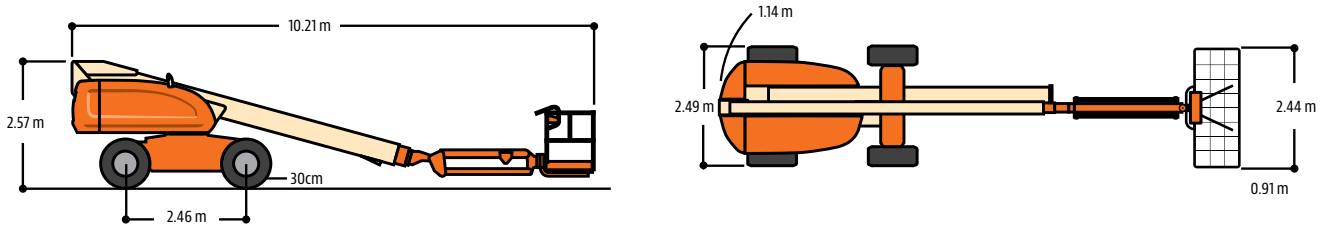

Reach Diagrams

