



SPIDER CRANE

MC285C-3

Crane Capacity

$2.82\text{t} \times 1.4\text{m}$

Max. working radius

$8.205\text{m} \times 0.15\text{t}$

Max Lifting Height

8.7m

NEW



Slim Body Width : 750mm
Slew Angle Limit Setting
Multi Outrigger Positions
Multi Outrigger Lifting Mode
Crane/Outrigger Interlock System
Digital Feedback Remote Control
4 Fall/2 Fall Hook Block
EU Stage V Compliant Engine



Paddle Lever
Radio Remote Control



Programmable
Moment Limiter



Detachable Electric Motor
(Option)



Auxiliary Winch (Option)




Searcher Hook (Option)

Specifications

Model	MC285C-3
Crane capacity	2.82t x 1.4m
Max. working radius	8.205m x 0.15t
Max.lifting height (on the ground)	8.7m
Max.lifting height (underground)	-10.1m (4 falls)
Max.lifting height (underground)(optional auxiliary winch)	-100m (single fall)
Winch system	Hook speed 9.3m/min (4 layers, 4 falls)
	Hoist wire rope IWRC 6 X Fi (29) 0/0, ϕ 7x48.0m
Telescoping system	Type Fully automatic 5-section pentagonal telescopic boom (3 to 5 section : simultaneous telescoping)
	Boom length 2.535m - 8.575m
	Boom telescoping stroke / time 6.04m / 22sec
Boom hoist system	Hoist angle / time 0 to 80deg / 14.0sec
Slew system	Slew angle / time 360deg / 0.88rpm
Outrigger system	Type 1st stage with flexible stay damper, 2nd stage manual pullout hydraulic cylinder direct acting type
	Max.extended width (between outside of OR adapters) (Lateral) 4,782mm x (Front) 4,718mm x (Rear) 3,990mm
Travel system	Type Hydraulic motor driven , stepless speed changer
	Travel speed 0 - 2.2km/h
	Gradability 20deg
	Crawler ground length x width 975mm x 200mm
Engine(diesel)	Model YANMAR 2TNV70-NMBA
	Displacement 569cc (0.569L)
	Rated output 7.4kw (10.1PS) / 2,500rpm
	Starting method Electric starting
Motor (MC285CWM-3)	Fuel / Fuel tank capacity Diesel / 12.0L
	Motor model IKKH-FBK8G-4P-5.5kw
	Motor type Totally enclosed fan-cooled motor 5.5kw, 4P 380V
Remote control system	Starting system Inverter system (30Hz-60Hz)
	Type Radio & paddle type control
Overall length x width x height (MC285CWM-3)	
2,800mm x 750mm x 1,470mm	
Overall length x width x height (MC285CWM-3)	
3,285mm x 750mm x 1,470mm (Detachable E-motor)	
Machine weight (MC285CWM-3)	
1,990kg (2,160kg with Aux winch)	
Machine weight (MC285CWM-3)	
2,160kg (2,330kg with Aux winch)	
Safety device	
Overwind protection, Angle indicator, Hydraulic safety valve, Wire rope latch, Level, Machine body inclination alarm, EMO switch, Moment limiter, Working status lamp, Data logger, Crane & Outrigger interlock device	
Options	
White rubber tracks, Single fall hook, 850kg searcher hook, 900kg auxiliary winch	

Dimensions

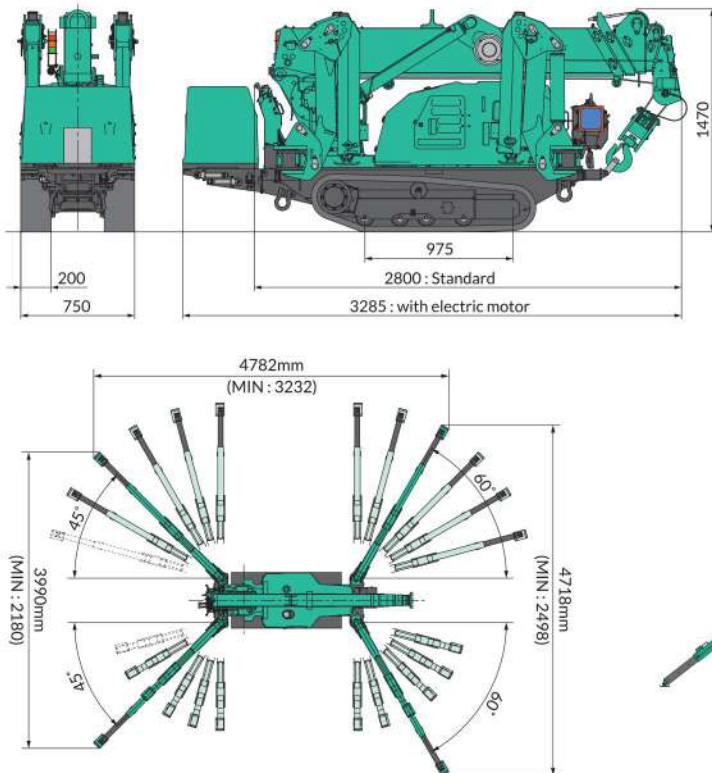

SPIDER CRANE MC285C-3


Rated Total Load Chart (4falls)

Outrigger extended to maximum							
2.535m / 4.075m Boom		5.575m Boom		7.075m Boom		8.575m Boom	
Working radius(m)	Rated total load(kg)	Working radius(m)	Rated total load(kg)	Working radius(m)	Rated total load(kg)	Working radius(m)	Rated total load(kg)
1.4 or less	2820	3.0 or less	1220	3.6 or less	820	4.0 or less	550
1.5	2520	3.5	970	4.0	740	4.5	400
2.0	1920	4.0	780	4.5	580	5.0	340
2.5	1570	4.5	630	5.0	480	5.5	300
3.0	1220	5.0	530	5.5	430	6.0	270
3.5	970	5.205	530	6.0	380	6.5	230
3.705	920			6.5	350	7.0	200
				6.705	330	7.5	180
						8.0	150
						8.205	150


Outrigger extended to other than maximum							
2.535m / 4.075m Boom		5.575m Boom		7.075m Boom		8.575m Boom	
Working radius(m)	Rated total load(kg)	Working radius(m)	Rated total load(kg)	Working radius(m)	Rated total load(kg)	Working radius(m)	Rated total load(kg)
1.5 or less	1720	3.0 or less	510	3.6 or less	400	4.0 or less	330
2.0	1070	3.5	410	4.0	330	4.5	280
2.5	630	4.0	330	4.5	280	5.0	230
3.0	520	4.5	280	5.0	230	5.5	180
3.5	390	5.0	200	5.5	180	6.0	160
3.705	350	5.205	200	6.0	160	6.5	130
				6.5	130	7.0	100
				6.705	120	7.5	80
						8.0	70
						8.205	60

* The Rated Total Load Chart is based on actual working radius including boom deflection.
 * The weight of hook block (standard 4 fall / 2 fall-30kg) must be included as part of the load shown in the Rated Total Load Chart.
 * When using two falls hook or single fall hook, use the appropriate four falls Rated Total Load Chart shown above but with a maximum load of -1410kg for two falls and -710kg for Single fall.

MAX. Reach Below Ground

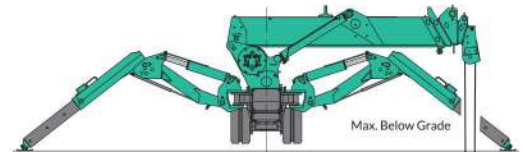

Working Range Chart (4falls)

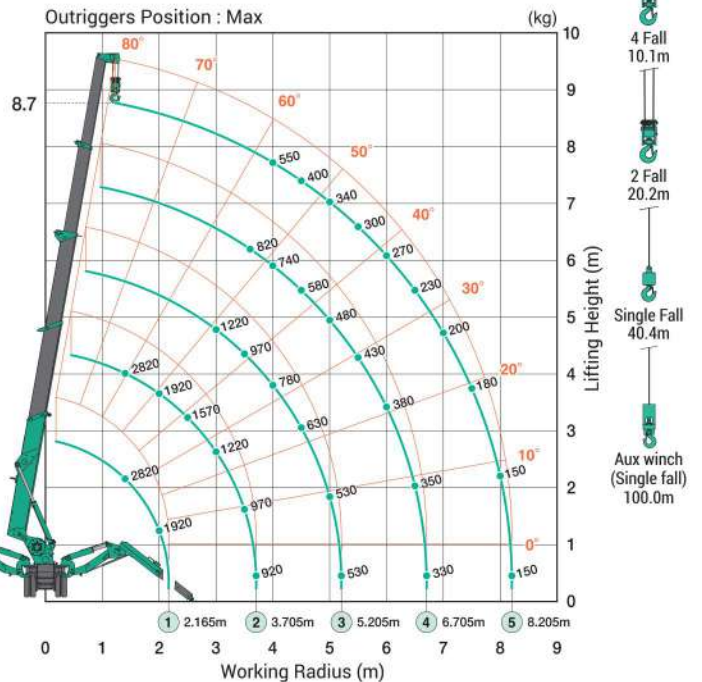

* Due to improvements, the specifications are subject to change without notice.

Before use, please read the Operation Manual



CONTACT INFORMATION
 10-12 Industry Park Dr, Brooklyn
 VIC 3012, Australia
 PHONE: (03) 9314 4466, 1800 627 748
 EMAIL: info@quickaccess.com.au