SJ3215
ELECTRIC SCISSORS

STANDARD FEATURES

- Drivable at full height
- Variable speed, front wheel hydraulic drive
- Dual holding brakes
- SKYCODED™ Colour coded and numbered wiring system
- On-board visual interface with diagnostic capabilities
- Shroud style, impact resistant composite control box with extended cable
- Proportional controls for drive & lift functions
- Tilt sensor (3.5° x 1.5°)
- 0.91 m Roll out extension deck
- 24V DC Power source
- Low voltage battery protection
- 25% Gradeability
- Solid rubber, non-marking tyres
- Pothole protection system
- Wiring for AC outlet at platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Lanyard attachment points
- Operator horn
- Forklift pockets and tie down / lift lugs
- Overload sensing system
- Solid railings
- Half height spring hinged entry gate
- Telematics ready
- White noise alarm
- Flashing light

OPTIONS

- Light duty pipe rack
- Heavy duty pipe rack
- Board carrier
- Tool caddy
- Dual flashing lights
- 250 Ah Batteries
- AGM Batteries
- Lockable swingout trays
- Full height spring hinged entry gate
- Bio oil
- Secondary Guarding Lift Enable (SGLE)
- ECOTRAY leak containment system
- ELEVATE telematics
- ELEVATE Battery Management System (BMS)*

† Standard lead times may be increased when optional equipment is added, consult factory.
‡ Capacities and machine weights may differ when options are added.
* Only available with ELEVATE telematics

AS/NZ 08/2022

SKYJACK™ simply reliable

SJ3215 ELECTRIC SCISSORS

Dimensions	SJ3215	
A Work Height	6.44 m	
B Raised Platform Height	4.44 m	
C Lowered Platform Height	0.91 m	
D Overall Width	0.81 m	
E Overall Length	1.80 m	
F Stowed Height	1.88 m	
G Platform Width (Inside Dimension)	0.66 m	
H Platform Length (Inside Dimension)	1.55 m	
Specifications	**SJ3215**	
Extension Deck (Roll Out)	0.84 m	
Ground Clearance (Pothole Raised)	8.9 cm	
Ground Clearance (Pothole Deployed)	2.0 cm	
Wheelbase	1.37 m	
Weight	1,148 kg	
Gradeability	25%	
Turning Radius (Inside)	0	
Turning Radius (Outside)	1.65 m	
Lift Time (With Rated Load)	17 sec	
Lower time (With Rated Load)	16 sec	
Drive Speed (Stowed)	3.4 km/h	
Drive Speed (Raised)	1.1 km/h	
Maximum Drive Height	Full Height	
Capacity (Overall)	272 kg	
Distributed Capacity (Main Platform)	159 kg	
Distributed Capacity (Extension Deck)	113 kg	
Local Floor Load (With Rated Load)	1,093 kN/m2	
Overall Floor Load (With Rated Load)	991 kg/m2	
Maximum # of persons at 0 m/s wind rating	2	
Maximum # of persons up to 12.5 m/s wind rating	1	
Tyre Type	Solid, N/M	
Tyre Size	12 x 4 x 8	

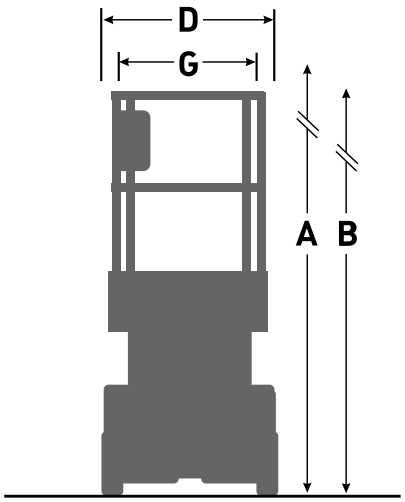

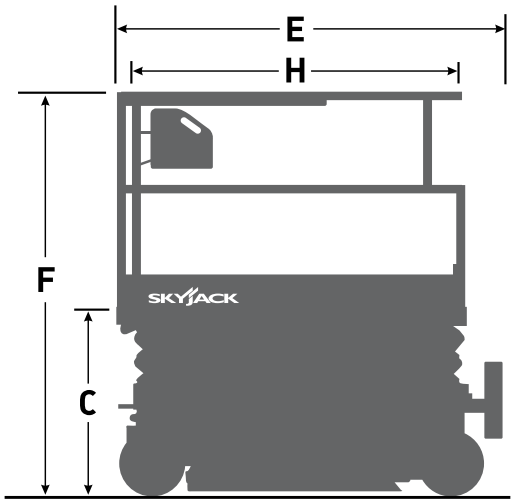

Skyjack Australia Pty Ltd
Unit 1, 35 Honeycomb Drive
Eastern Creek
NSW 2766
Australia
Phone +61 (0) 2 9854 0700
Fax +61 (0) 2 9854 0777
Email: jcranmer@skyjack.com

www.skyjack.com

SKYJACK simply reliable

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. AS marked platforms are in conformance to Standard AS/NZS 1418.10:2011.